


## NOTES FOR EDITORS

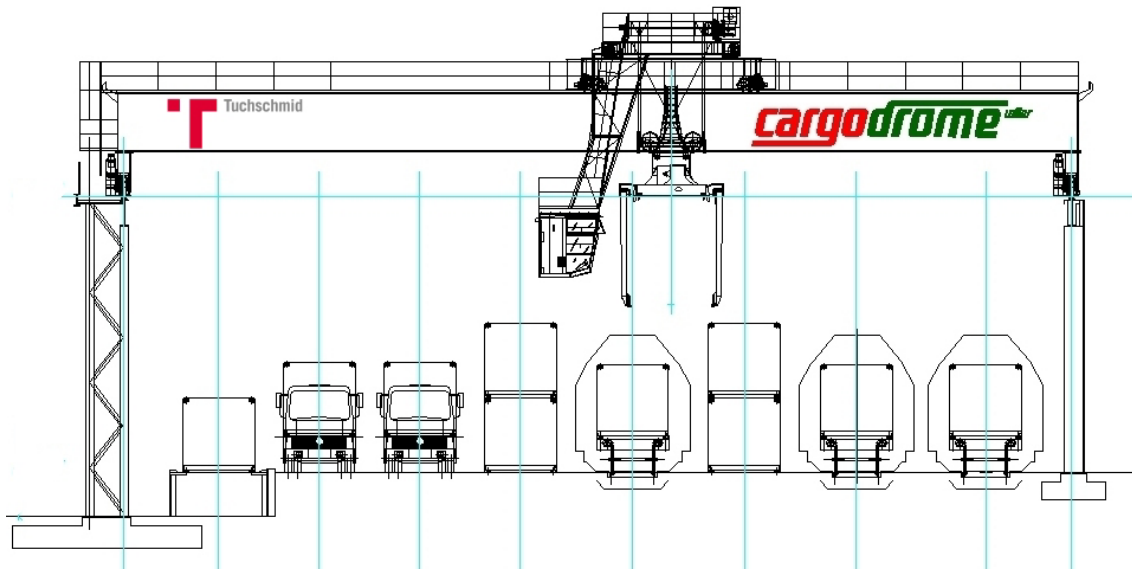

### Technical data - Compactterminal

The transshipment module consists of the following components:

- Double-Box Beam bridge crane
  - span 33 m
  - load on cables 53'000 kg
  - crane speed: 0 - 200 m/min
  - trolley speed: 0 - 60 m/min
  - hoisting speed - partial load (16'000 kg): 0 - 40 m/min
  - full load (41'000 kg): 0 - 20 m/min
  - crane cab heated/air-conditioned
  - turning (Trolley/Spreader) 0 – 2 u/min
  - installed output: 450 KW
  - weight crane/trolley: 110'000 kg
  
- Spreader
  - telescopic 20-40'
  - grab arm height 3,6 m
  - Payload at Spreader 41'000 kg
  - Spreader weight: 13'000 kg
  
- Electrical data
  - operating current: 400V/50Hz
  - control panel voltage 230V
  
- elevated steel crane track
  - length 245 m
  - rail height 9,6 m
  - service gangway the entire length including one set of access stairs